

# SSMLB-EL75DR

INGROUND LANDSCAPE LIGHT  
 5w / 346lm | 8w / 628lm



## MOTORIZED RETRACTABLE LIGHT

Pathway Lighting | Accent Lighting

Imagine a world where your landscape lights rise at dusk to beautifully illuminate your pathways, gardens, or architecture—then disappear by dawn, leaving no visual clutter.


Introducing the first-ever motorized retractable landscape light, engineered for both form and function. Perfect for landscape architects, lighting designers, and maintenance teams seeking innovation with elegance.

Our retractable motorized Landscape Light is perfect for pathway and area lighting. 360° light distribution. Multiple color temperatures are available. 4 levels of brightness are able to be selected once powered.

Choose from 3 different fully raised height build options of 6", 12" or 24". When powered on, the fixture raises to max height and when powered off, fixture retracts to be flush with ground level. Works with standard 12vac landscape transformer.

### Features:

- Extruded aluminum housing & stainless steel
- 360°light distribution
- Polycarbonate frosted Lens
- 4 brightness levels available for adjustment
- IP66 Waterproof
- Winter mode setting
- CCT Options : 2700K / 3000K / 4000K / 5000K
- 3 Year Warranty

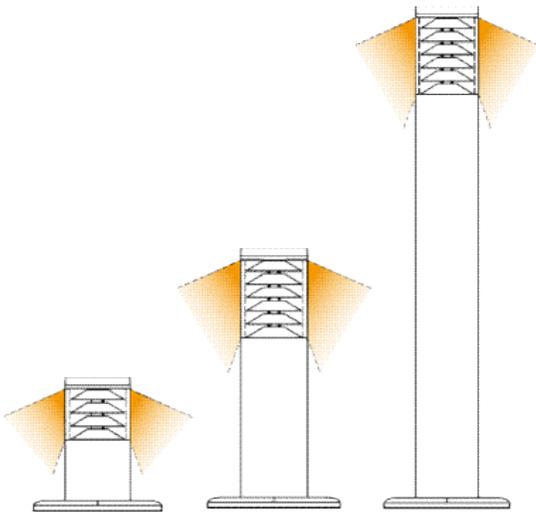


Diameter	Ø3"		
Raised Height	6"	12"	24"
Wattage (Max.)	5w	8w	8w
Input Voltage	AC10-18V		

# SSMLB-EL75DR

## SPECIFICATIONS

Date: .....  
Type: .....  
Project: .....  
Firm: .....

### PROFILE

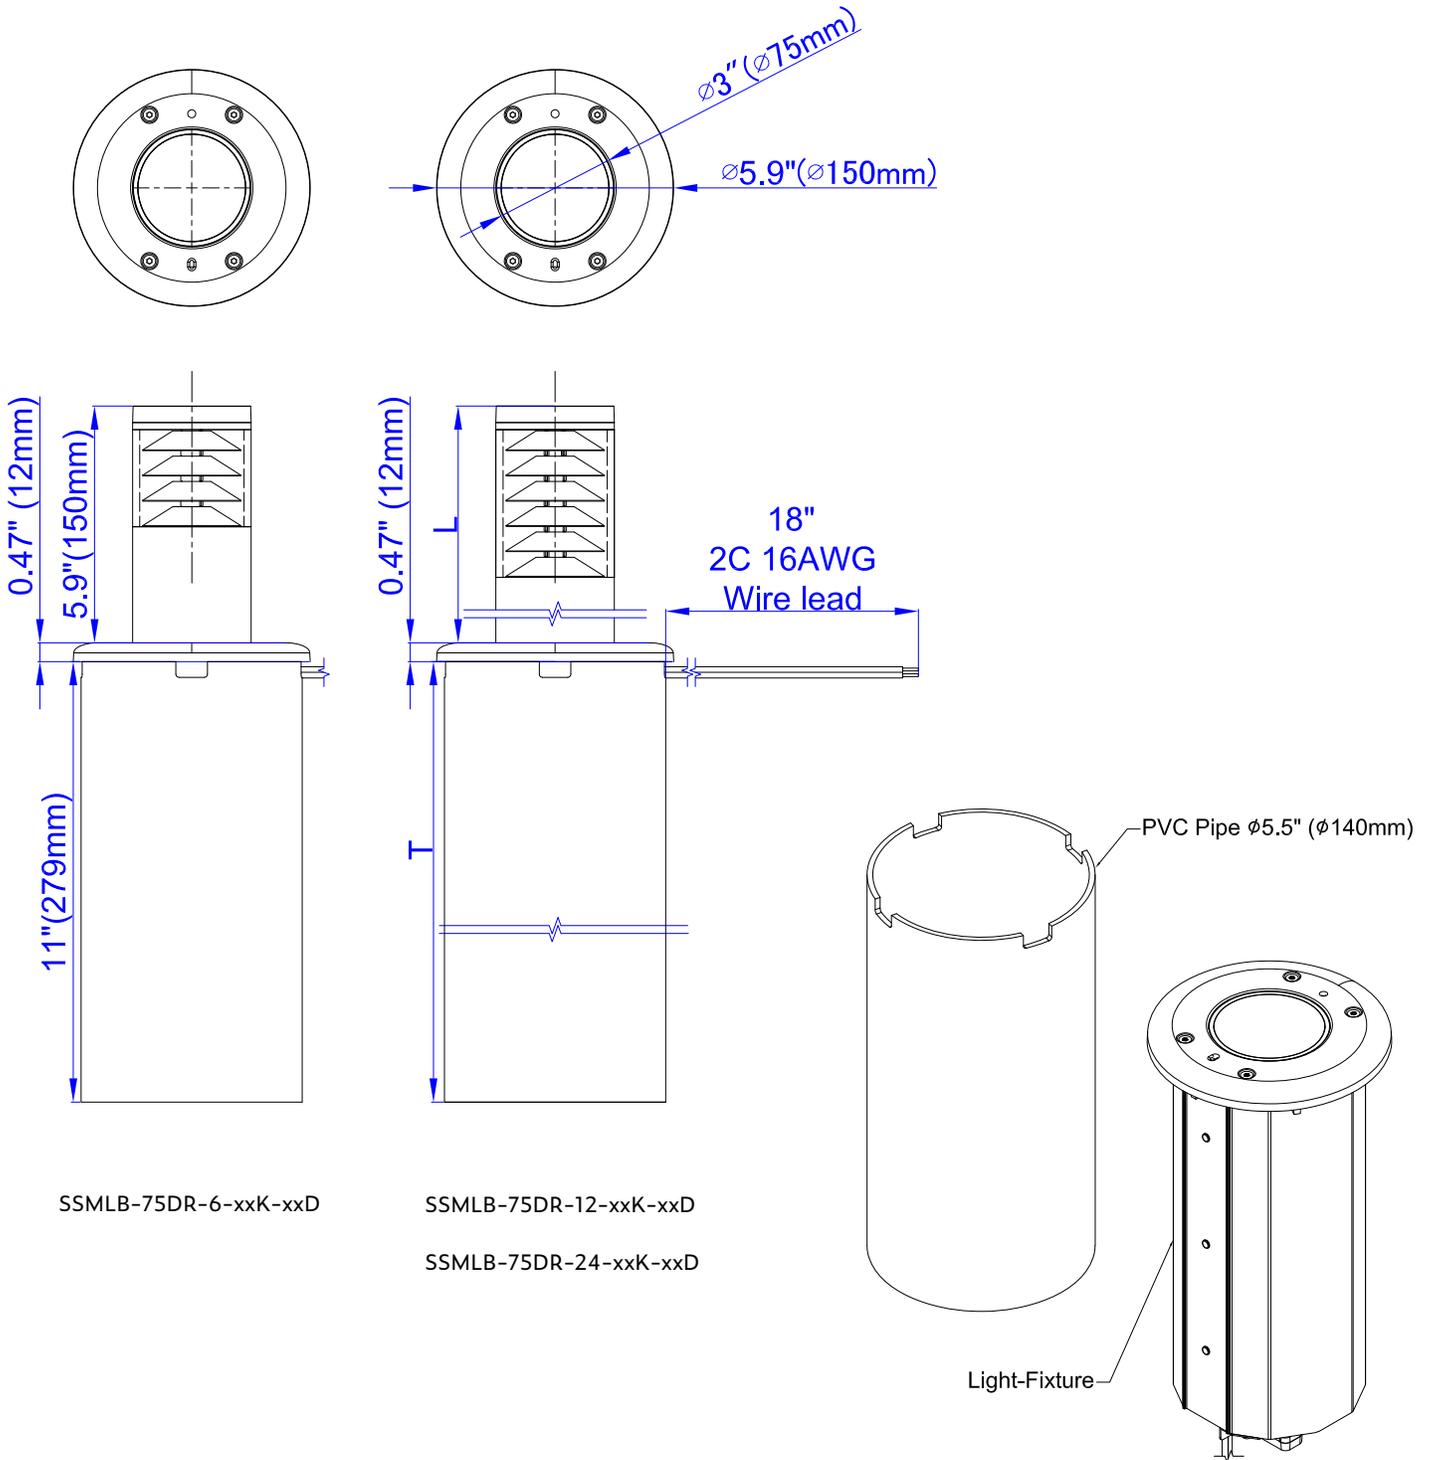

SSMLB-75DR-6-xxK-xxD

SSMLB-75DR-12-xxK-xxD

SSMLB-75DR-24-xxK-xxD

# SSMLB-EL75DR

## SPECIFICATIONS

Date: .....  
 Type: .....  
 Project: .....  
 Firm: .....

### SSMLB-EL75DR - 360° Illumination

Physical		SSMLB-EL75DR-6-xxK-360D	SSMLB-EL75DR-12-xxK-360D	SSMLB-EL75DR-12-xxK-360D
Light Fixture				
Material	Stainless Steel & Extruded Aluminum			
Finishing	Powder Coated Black			
Diameter	Ø3" (Ø75mm)			
Raised Height	5.9" (150mm)	11.8" (300mm)	23.6" (600mm)	
Environment	IP66			
Lens	Polycarbonate Frosted Lens			
Fixture Base				
Material	Extruded Aluminum & PVC Pipe			
Pipe Diameter	Ø5.5" (Ø140mm)			
Pipe Height	11" (279mm)	16.9" (429mm)	28.7" (729mm)	
Installation Recommended Hole Size	Diameter	Ø7.9" (Ø200mm)		
	Depth	13" (330mm)	19" (483mm)	31" (788mm)

Performance				
Color Temperature Options	2700K , 3000K , 4000K , 5000K			
Light Distribution	360° Light Distribution			
Lumen Output	346 lm @3000K	628 lm@3000K	628 lm@3000K	
Adjustable Brightness	4 brightness levels available for adjustment			
Operating Temperature	0°C to +50°C, 32°F to 122°F			

### Electrical

Input Voltage	AC10-18V			
Power Consumption	5w/pc.	8w/pc.	8w/pc.	
	*The light consumes a maximum of 12W when it is rising up while powered on.			

# SSMLB-EL75DR

## ORDER FORM

Date: .....

Type: .....

Project: .....

Firm: .....

SSMLB-EL75DR-xx"-xxK-360D

### CREATE YOUR FIXTURE

#### MODEL

SSMLB-EL75DR

#### RAISED HEIGHT

6"  
12"  
24"

6 inches  
12 inches  
24 inches

#### COLOR

27k	2700k
30k	3000k
40k	4000k
50k	5000k

#### BEAM

360                      360°