


SSMLB-EL90U

INGROUND LANDSCAPE LIGHT
12w / 721lm

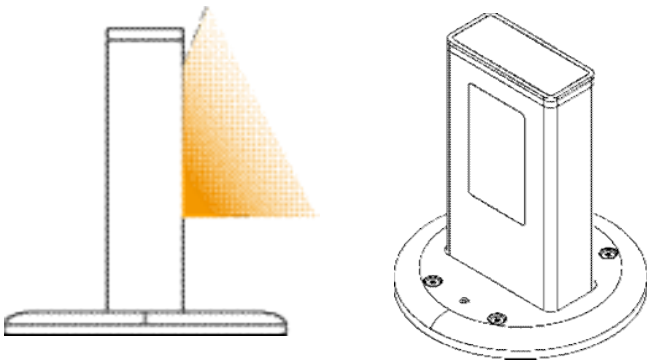

MOTORIZED RETRACTABLE LIGHT

Wall-wash Lighting | Accent Lighting

Imagine a world where your landscape lights rise at dusk to beautifully illuminate your pathways, gardens, or architecture—then disappear by dawn, leaving no visual clutter.

Introducing the first-ever motorized retractable landscape light, engineered for both form and function. Perfect for landscape architects, lighting designers, and maintenance teams seeking innovation with elegance.

Our retractable motorized Landscape Light is perfect for pathway and area lighting. 120° light distribution. Multiple color temperatures are available. 4 levels of brightness are able to be selected once powered.

When powered on, the fixture raises to max height and when powered off, fixture retracts to be flush with ground level. Works with standard 12vac landscape transformer.

Features:

- *Extruded aluminum housing & stainless steel*
- *Single-sided upward lighting*
- *120° wide beam angle*
- *Polycarbonate clear Lens*
- *4 brightness levels available for adjustment*
- *IP66 Waterproof*
- *Winter mode setting*
- *CCT Options : 2700K / 3000K / 4000K / 5000K*
- *3 Year Warranty*

Diameter	1.6" x 3.5"
Raised Height	6"
Wattage (Max.)	12w
Input Voltage	AC10-18V

SSMLB-EL90U

SPECIFICATIONS


Date:

Type:



Project:

Firm:

PROFILE

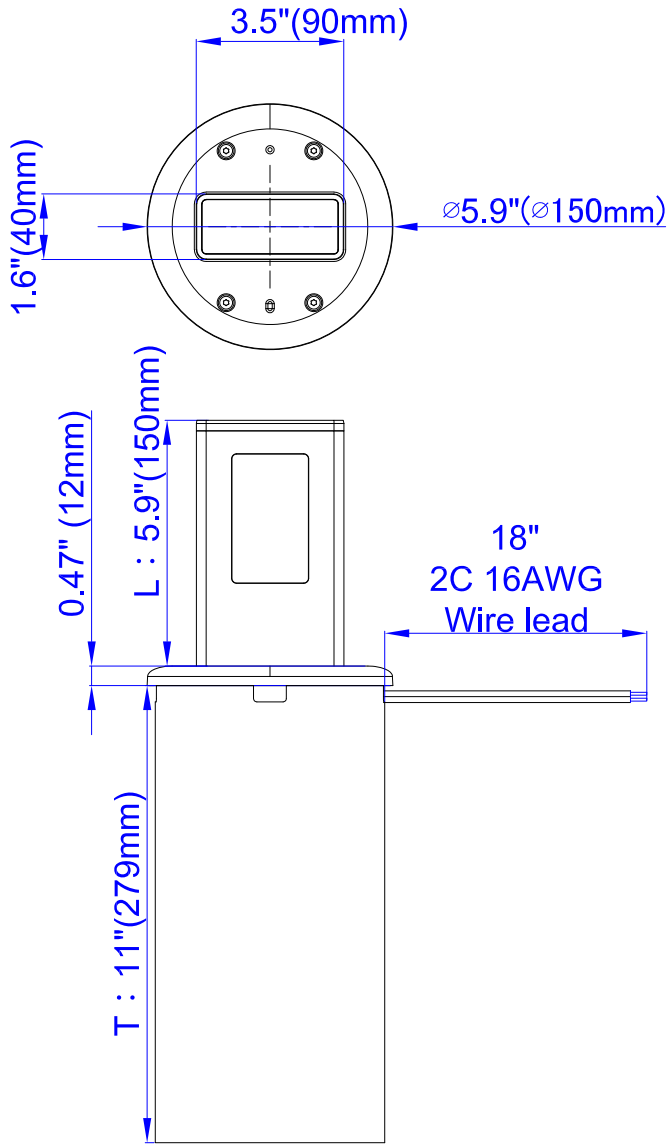

SSMLB-EL90US-6-xx-xxD

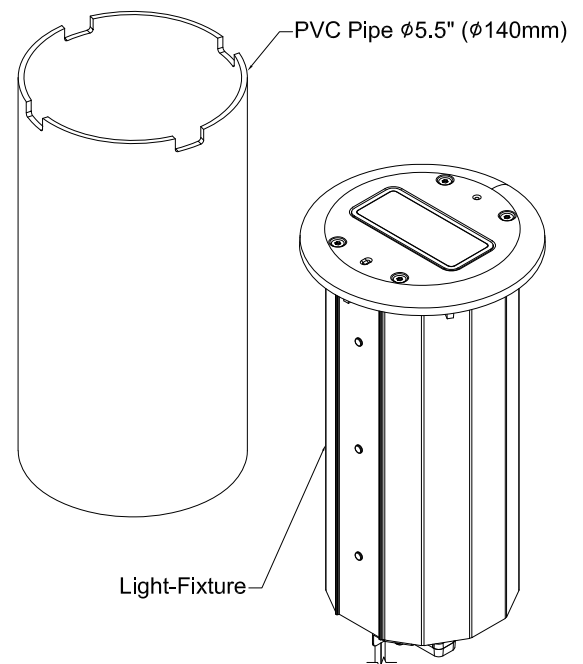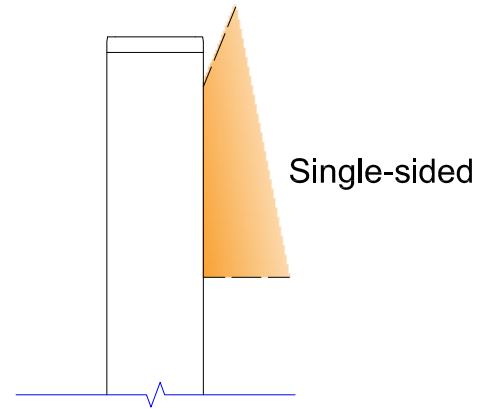

SSMLB-EL90U

SPECIFICATIONS

Date:

Type:

Project:

Firm:

SSMLB-EL90U- 120° Illumination

Physical

SSMLB-EL90U-6-xxK-120D		
Light Fixture		
Material	Stainless Steel & Extruded Aluminum	
Finishing	Powder Coated Black	
Dimensions	3.5" x 1.6" (90mm x 40mm)	
Raised Height	5.9" (150mm)	
Environment	IP66	
Lens	Polycarbonate Clear Lens	
Fixture Base		
Material	Extruded Aluminum & PVC Pipe	
Pipe Diameter	Ø5.5" (Ø140mm)	
Pipe Height	11" (279mm)	
Installation Recommended Hole Size	Diameter	Ø7.9" (Ø200mm)
	Depth	13" (330mm)

Performance

Color Temperature Options	2700K , 3000K , 4000K , 5000K
Beam Angle	120°
Lumen Output	721 lm @3000K
Adjustable Brightness	4 brightness levels available for adjustment
Operating Temperature	0°C to +50°C, 32°F to 122°F

Electrical

Input Voltage	AC10-18V
Power Consumption	12w/pc.
	*The light consumes a maximum of 12W when it is rising up while powered on.

SSMLB-EL90U

ORDER FORM

Date: _____
Type: _____
Project: _____
Firm: _____

CREATE YOUR FIXTURE

SSMLB-EL90U-xx"-xxK-120D

MODEL

SSMLB-EL90U

RAISED HEIGHT

6"

6 inches

COLOR

27k
30k
40k
50k

2700k
3000k
4000k
5000k

BEAM

120

120°

